
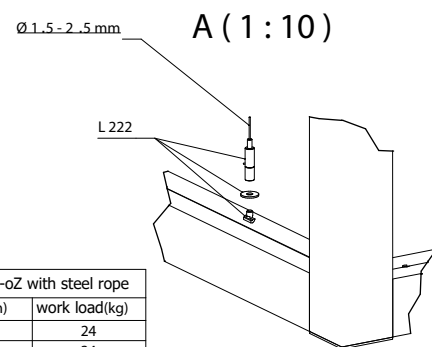





TI-L-1.0: OCTALUX CUBE SUSPENDED

Technical Information

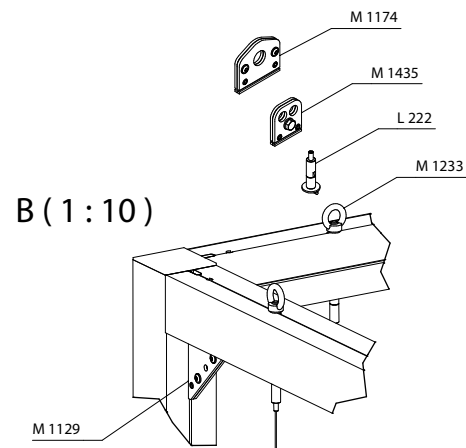

work load OL 222-oZ with steel rope	
rope diameter (mm)	work load(kg)
1.5	24
1.8	34
2.0	48
2.5	68


Steel rope galvanized 7x7,
Spec. strength = min. 2300 N/mm²
(service coefficient = 5)

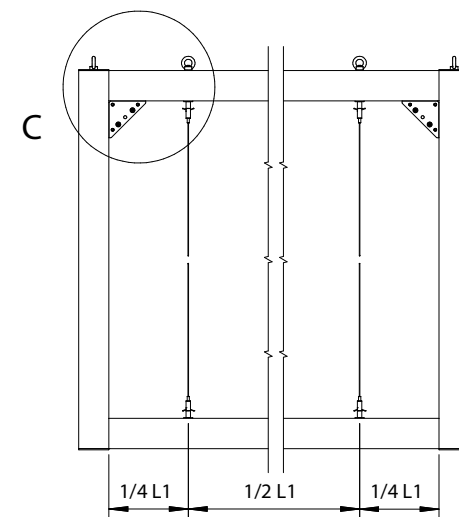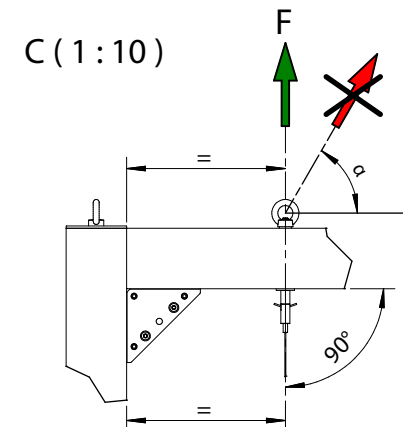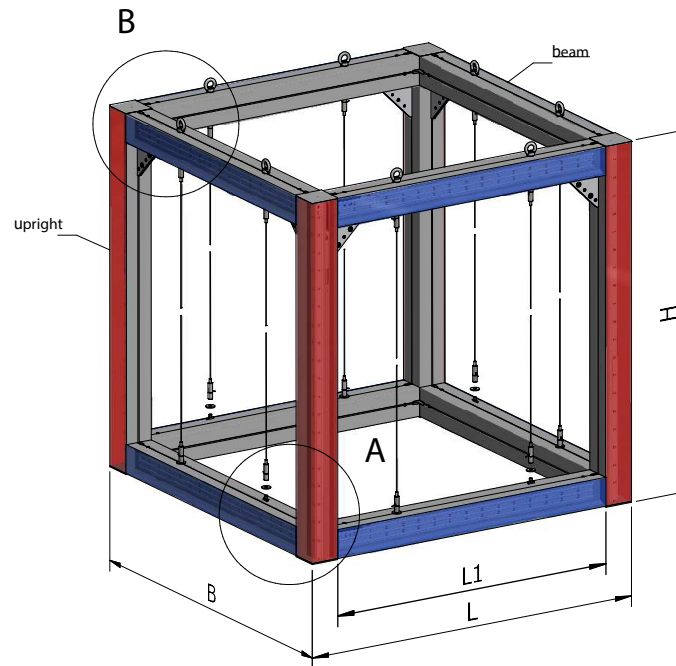

TI-L-1.0 E-000658-0011A-T02 A In Bearbeitung

TI-L-1.0: OCTALUX CUBE SUSPENDED

Technical Information

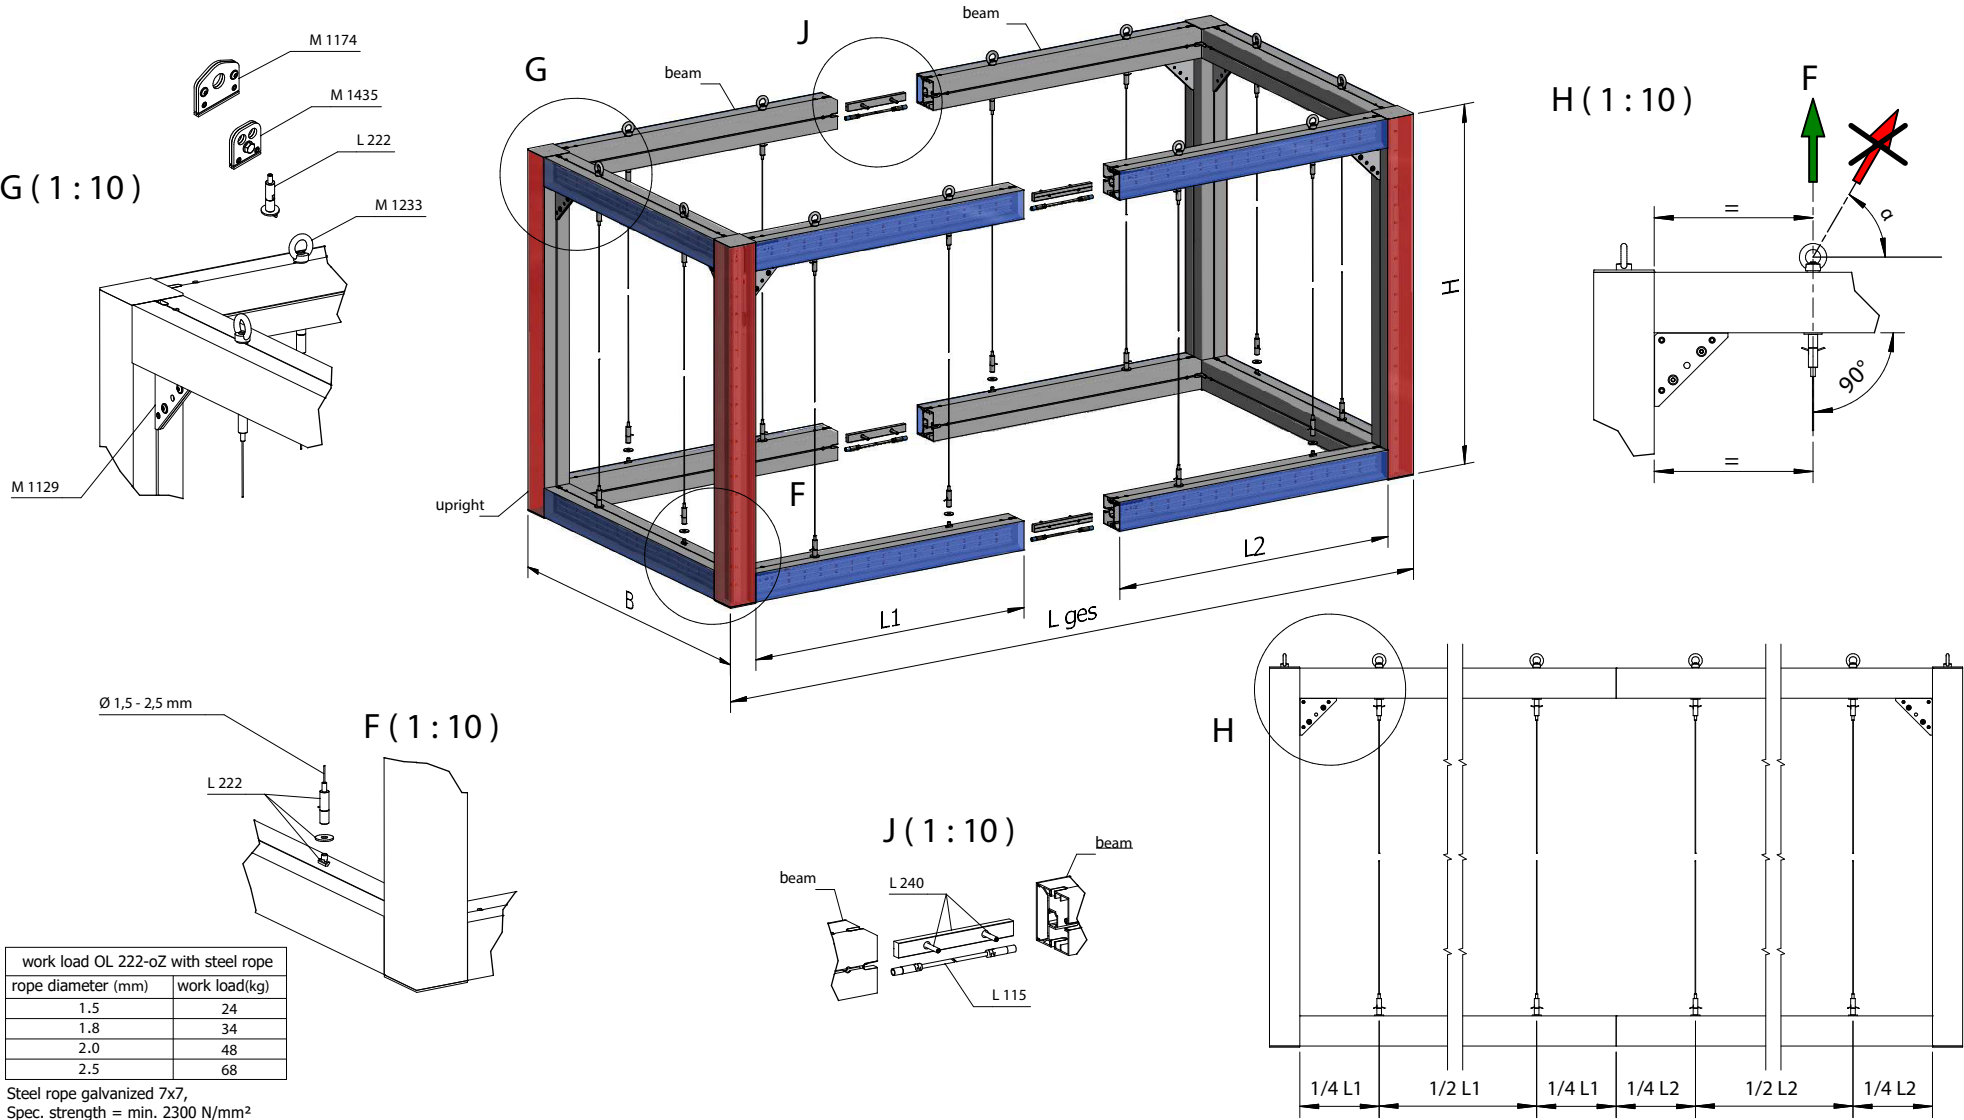

TI-L-1.0 E-000658-0011A-T02 A In Bearbeitung